



E3S Straight Sliding Hardware

| E3S SPECIFICATIONS | |
|---------------------|-----------------|
| max panel weight | 300kg |
| max panel height | 4000mm |
| max panel width | 3000mm |
| max panel area | 8m ² |
| min panel thickness | 38mm |


The smooth operation of Centor's top-hung E3 bifold hardware has been adapted to create the E3S sliding system. Featuring stainless steel bearings and ground nylon tyres, concealed E3S quietly and comfortably moves aside loads up to 300kg. Use E3S inside or out, for residential or commercial applications where high function is required.

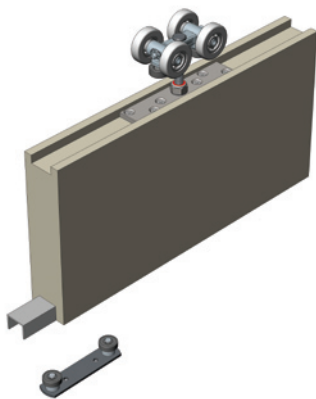

GUIDE CHANNEL CONCEALED DOOR

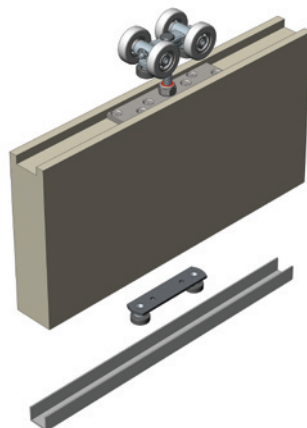

GUIDE CHANNEL IN FLOOR



CARRIER WITH ALUMINIUM SLIDER

NEW!**E3S COMPONENTS**

| Part | Product Code | Description |
|---|-----------------|--|
|  | E32C4B | E3 straight sliding 2 wheel carrier, 100mm bolt |
|  | E34C4B | E3 straight sliding 4 wheel carrier, 100mm bolt |
|  | E34CCNSS | E3 straight sliding 4 wheel carrier nylon, stainless steel mounting screws included |
|  | E34CRP | E3 straight sliding 4 wheel carrier retainer plate, stainless steel mounting screws included |
|  | ATFGD16 | Airtrack floor guide double, to go with E22FCP polychannel |
|  | ATFGDN | Airtrack floor guide double, to go with E2FCA |
|  | E3TS | E3 straight sliding track stop |
|  | E3TA | E3 track available in various lengths and finishes |
|  | E2FCA | floor channel available in various lengths and finishes |
|  | E22FCR + E22FCP | floor channel retainer and polychannel, available in various lengths and finishes |