


# Whitco Stays for Casement and Awning Windows


## FITTING INSTRUCTIONS

1. Make sure you are using the correct size fitting by referring to specified window & rebate sizes on the outside of this carton.
2. Ensure sash fits opening, 1.6mm all round clearance. Head and sill must have flat surfaces on which to fit Whitco track.
3. Cut rebate in sash to measurements on carton; Casements in top and bottom rails; Awnings in side stiles.

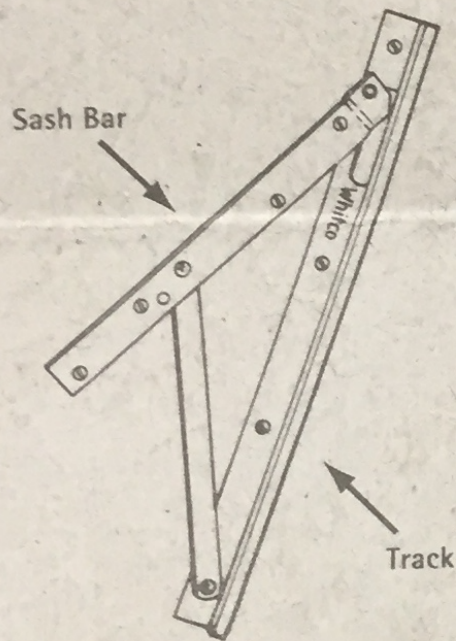


### 4a. Casement or Awning windows with mullions.

Fit sash bar hard up against inside of rebate: with end flush with edge of sash rail.

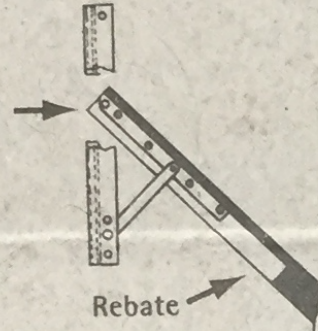


### 5a. Casement or Awning windows without mullions.

Fit sash bar hard up against inside of rebate.

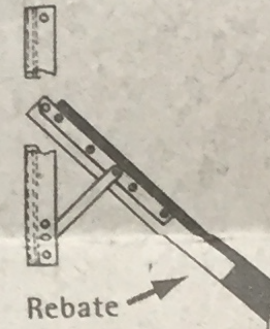

4b Fit back edge of track against weather stop.

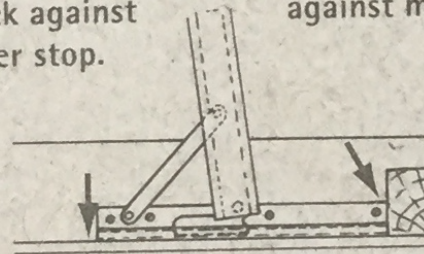

Fit end of track against mullion.

5b

Fit end of track flush with inside face of rebated meeting rail of adjoining sash.

