Sliding Door Lock

Manufactured entirely from Stainless steel and Aluminium to ensure a highly corrosion resistant lock kit in harsh coastal conditions.



The Zebratti sliding door lock has been developed as a low profile lock, for use with stacker and cavity sliding doors, in both timber and aluminium joinery.

The LCS Lock range requires a minimum of 37mm thick door section.

The twin locking prongs are driven by the snib inside the flush handle. The key is used finally to lock the prongs in place.

Handle fixings have been concelled for a clean minimal look.

Features

- Corrosion Resistant made entirely from Aluminium and Stainless Steel
- Smooth Operation
- Twin Locking Prongs anti lift

Specifications	Detail
Backsets	33, 40, 60mm
Min Stile Thickness	37mm
Lock Width	14mm
Handle Outer Size	242x38mm

Handle Surface Finishes

- Satin Chrome
- Matt Black
- Antique Bronze
- Powder Coated



Lock Kit


Lock kits include an adjustable strike plate and eurocylinder



Lock face options, specify when ordering.



Edgepull




Non-Edgepull

Item #	Configuration	Backseat
LCS ## THL	Twin Handle,	33,40 or
or SC	Double Key	60mm
LCS ## THLNL	Twin Handle, Single	33,40 or
or SC	Key	60mm
LCS ## THLB	Twin Handle (Blank outside handle),	33,40 or
or SC	Single Key	60mm
LCS ## THP or SC	Twin Handle, Privacy, and Single Key	33,40 or 60mm
LCS ## SHL	Single Handle,	33,40 or
or SC	Single Key	60mm
LCS ## THNLB	Twin Handle, (Blank outside handle), No Key	33,40 or 60mm


NOTE: Replace ## with backset dimension

Accessories



Blank Handle Timber Fixing Kit 100LCSFPB LCSTF

Handle Options

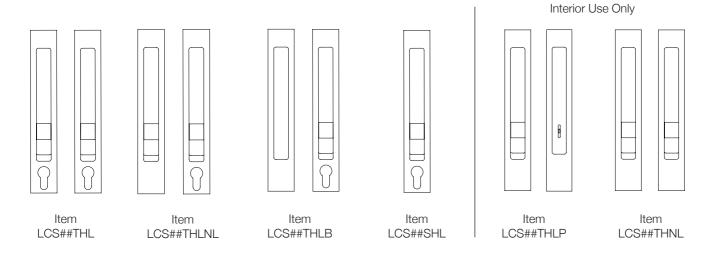



72 May 22, 2019


33mm Backset Lock


40mm Backset Lock

60mm Backset Lock











Sliding Lock Flush Handle

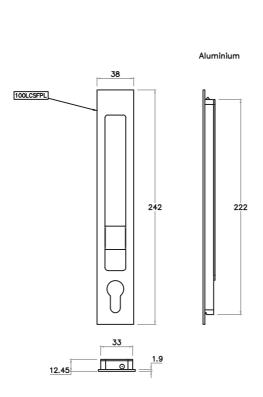

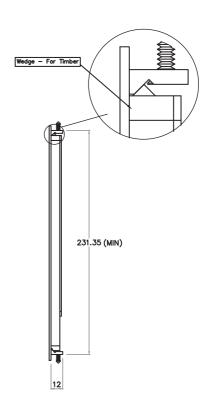

May 22, 2019 73

